

Product's Features

- The main body is made of aluminum die-cast, white
- The diffuser is anodized aluminum
- Anti-glare lighting design
- High temperature flame retardant lampholders, terminals and wires

Applications

- Office, shopping malls, schools, factories and so on

Technical parameters



- type of light source : LED
- Lamp power : 4-36W
- Electrical Type: Switching Power Supply
- Working power supply : 220V~240V , 50Hz
- Color temperature : 2700-3000K, 3500-4000K,6000-6500K
- Insulation Grade : Class 1
- Safety Standards : IEC598
- Color rendering index: Ra ≥ 80 , Ra ≥ 90
- Lumen value: 100LM/W,120LM/W
- Life expectancy: 50,000 h ( Ta=25°C )
- Luminous angle:15°、24°、38°、60°




Order Guide :

<b>GHCE</b>	<b>009</b>			<b>DA</b>		<b>AM</b>	<b>EI</b>		
<b>Model</b>			<b>Dimension</b>		<b>Electrical appliances</b>		<b>installation</b>		<b>Choose to match</b>
GHCE			48 Φ80 H 48 60 Φ80 H 60 62 Φ108 H 62 72 Φ108 H 72 92 Φ108 H 92 80 Φ135 H 80 120 Φ135 H 120		PS Switching power supply  Please refer to the power supply technical information		EI Embedded installation		OP Power line Triac Triac Dimmable Driver DALI DALI dimmable 0-10V 0-10V dimmable ED Emergency devices
	<b>Number</b>	<b>Power Qty</b>		<b>Design</b>		<b>reflector</b>			1. The emergency device is installed outside the lamp body. 2. Duration time: ≥60min , 90min , 180min. 3. Battery:Li-ion. 4. Emergency power: ( 1 ) 100% Lamp power emergency. ( 2 ) Reduce Lamp power emergency. 5. Charging time:≥36HR. 6. Working temperature : -10°C~+50°C.
	009	004 4W 007 7W 012 12W 018 18W 030 30W 036 36W		DA Die-cast aluminum		AM Mirror aluminum		<b>Voltage</b>	
								220 220-240V	

Remark:compliance with the requirement of the buyer

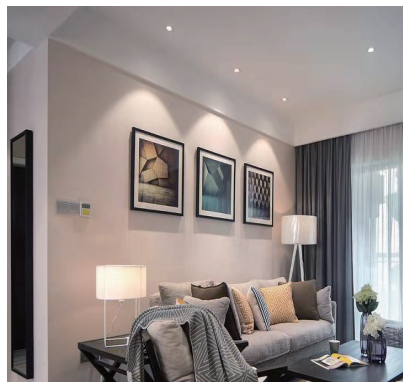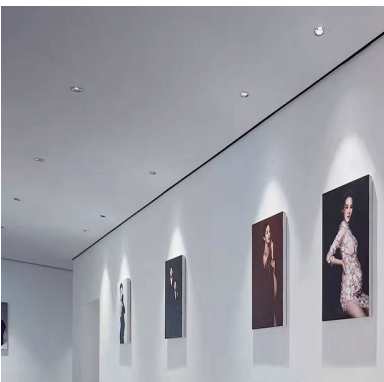

Model	Number	Power (W)	Diameter ( mm )	Highly(mm)
GHCE	009	4	80	48
GHCE	009	7	80	60
GHCE	009	7	108	62
GHCE	009	12	108	72
GHCE	009	18	108	92
GHCE	009	18	135	80
GHCE	009	30	135	120

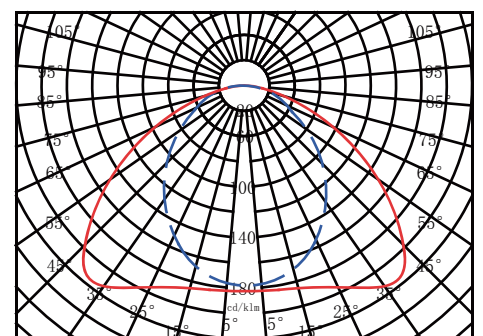

Lighting control	Dimming method	luminous flux
Manual control Intelligent control Emergency control	Dim0/1-10V dimmable DALI dimmable Triac dimmable DMX512 dimmable Not dimmable	100LM/W 120LM/W

LED driver	light source	Life expectancy
Optional configuration brand: MEAN WELL PHILIPS OSRAM TRIDONIC LTECH LIFUD KEGUPOWER	Optional configuration brand: CREE BRIDGELUX PHILIPS OSRAM SANAN	50,000 h ( Ta=25°C )

Certification certificate	Color rendering	Color temperature
CE RoHS COGC CCC	Ra ≥ 80 Ra ≥ 90	2700-3000K 3500-4000K 6000-6500K