

Product's Features

- Anti-fog shade
- Protect the eye design
- Intelligent drive, plug-in connector

Applications


- Residential, shopping malls, office, exhibition hall and other places

Technical parameters

- Light Source : LED
- Color temperature: 2700-3000K,3500-4000K,6000-6500K
- Light Power : 7W-60W
- Electrical Type: Smart Drive
- Working Power : 220V~240V , 50Hz
- IP Grade : IP20
- Insulation Grade : Class 1
- Safety Standards : IEC598
- Color rendering index:Ra ≥ 80 , Ra ≥ 90
- Lumen value:100LM/W,120LM/W
- Life expectancy: 50,000 h (Ta=25°C)




Order Guide :

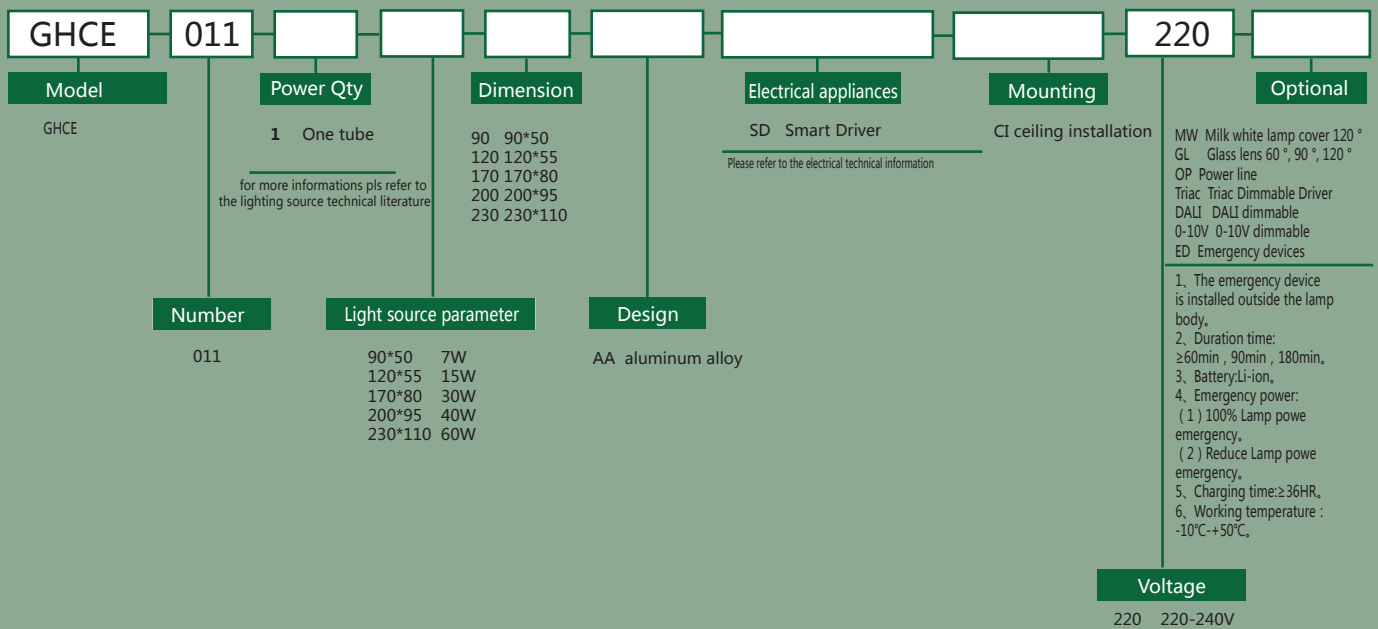

Remark:compliance with the requirement of the buyer



Model	Number	Tube amount	Power(W)	Diameter*Height(mm)
GHCE	011	1	7	90*50
GHCE	011	1	15	120*55
GHCE	011	1	30	170*80
GHCE	011	1	40	200*95
GHCE	011	1	60	230*110

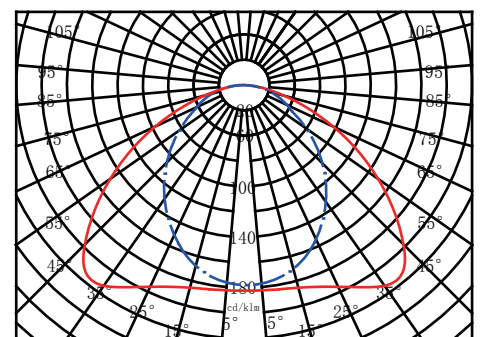

Lighting control	Dimming method	luminous flux
Manual control Intelligent control Emergency control	Dim0/1-10V dimmable DALI dimmable Triac dimmable DMX512 dimmable Not dimmable	100LM/W 120LM/W

LED driver	light source	Life expectancy
Optional configuration brand: MEAN WELL PHILIPS OSRAM TRIDONIC LTECH LIFUD KEGUPOWER	Optional configuration brand: CREE BRIDGELUX PHILIPS OSRAM SANAN	50,000 h (Ta=25°C)

Certification certificate	Color rendering	Color temperature
CE RoHS COGC CCC	Ra ≥ 80 Ra ≥ 90	2700-3000K 3500-4000K 6000-6500K