

Product's Features

- Lamp made of galvanized steel ,
- Die-cast aluminum lamps, acrylic lampshades
- with black coating finished,
- Anti-Glare lighting design,
- upper lamp hole 76mm, down lamp hole 140mm, 4m high, Custom height
- Flange 260*260mm

Applications


- shopping mall, park, square, roads and other public places

Technical parameters



- Light Source : energy-saving lamp , LED
- Light Base : E27 , LED
- Light Power : 23-50W
- Working Power : 220V , 50Hz
- Color rendering index: $R_a \geq 80$, $R_a \geq 90$
- Lumen value: 100LM/W, 120LM/W
- Color temperature: 2700K-6500K
- Life expectancy: 50,000 h ($T_a = 25^\circ\text{C}$)
- IP Grade : IP65
- Insulation Grade: Class 1
- Safety Standards: IEC598



Order Guide :

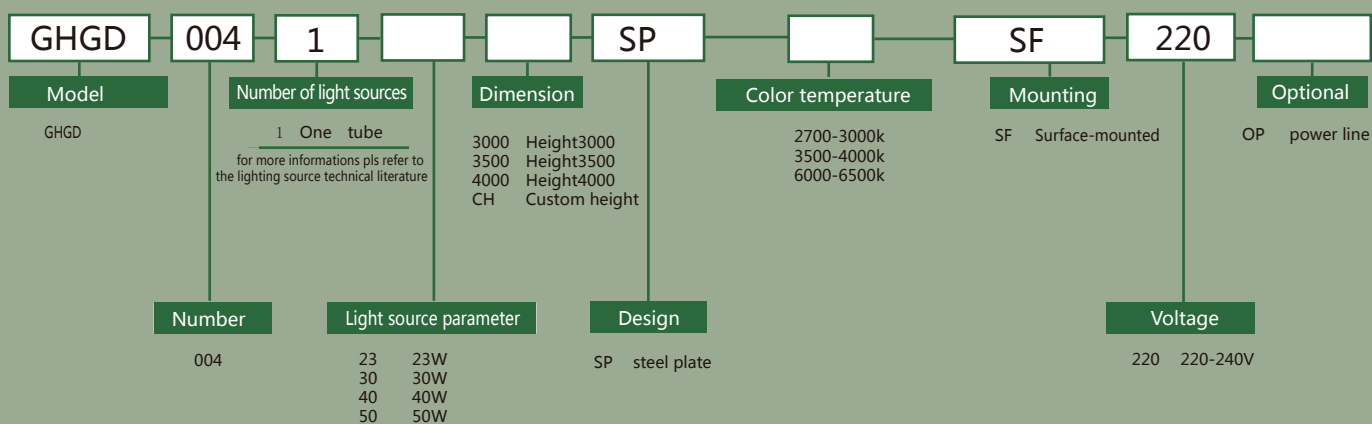

Remark: compliance with the requirement of the buyer

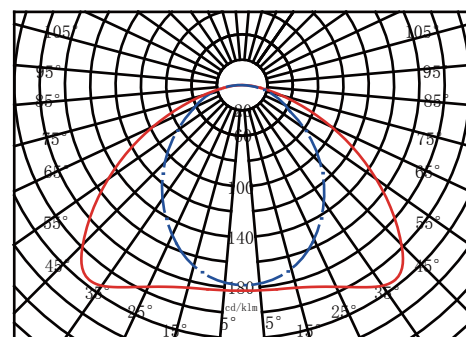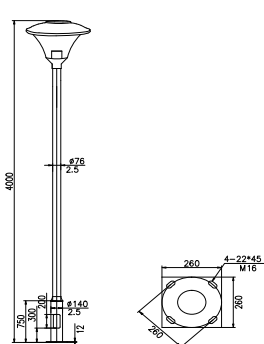

Model	Number	Number of light source	Power(W)	Height (mm)
GHGD	004	1	23	3000/3500/4000/Custom height
GHGD	004	1	30	3000/3500/4000/Custom height
GHGD	004	1	40	3000/3500/4000/Custom height
GHGD	004	1	50	3000/3500/4000/Custom height

Lighting control

Manual control
Intelligent control
Emergency control

Dimming method

Dim0/1-10V dimmable
DALI dimmable
Triac dimmable
DMX512 dimmable
Not dimmable

luminous flux

100LM/W
120LM/W

LED driver

Optional configuration brand:

MEAN WELL
PHILIPS
OSRAM
TRIDONIC
LTECH
LIFUD
KEGUPower

light source

Optional configuration brand:

CREE
BRIDGELUX
PHILIPS
OSRAM
EPISTAR
SANAN
FSL

Life expectancy

50,000 h (Ta=25°C)

Certification certificate

CE
RoHS
CQC
CCC

Color rendering

Ra ≥ 80
Ra ≥ 90

Color temperature

2700-3000K
3500-4000K
6000-6500K