

Product's Features

Material: aluminum lamp body
 Lampshade: milky white lampshade
 Design:
 Lamp length can be customized on demand
 Lamp power can be customized on demand

Applications


Office, shopping mall, supermarket,
 linear lighting, etc

Technical parameters



Light Source : LED
 Light Power : Customized on demand
 Electric Type : LED drive
 Working Power : 220-240VAC,24VDC
 Color rendering index: $R_a \geq 80$, $R_a \geq 90$
 Lumen value: 100LM/W, 120LM/W
 Color temperature: 2700-6500K
 Life expectancy: 50,000 h ($T_a = 25^\circ\text{C}$)
 IP Grade : IP40
 Insulation Grade: Class 1
 Safety Standards: IEC598





Order Guide :

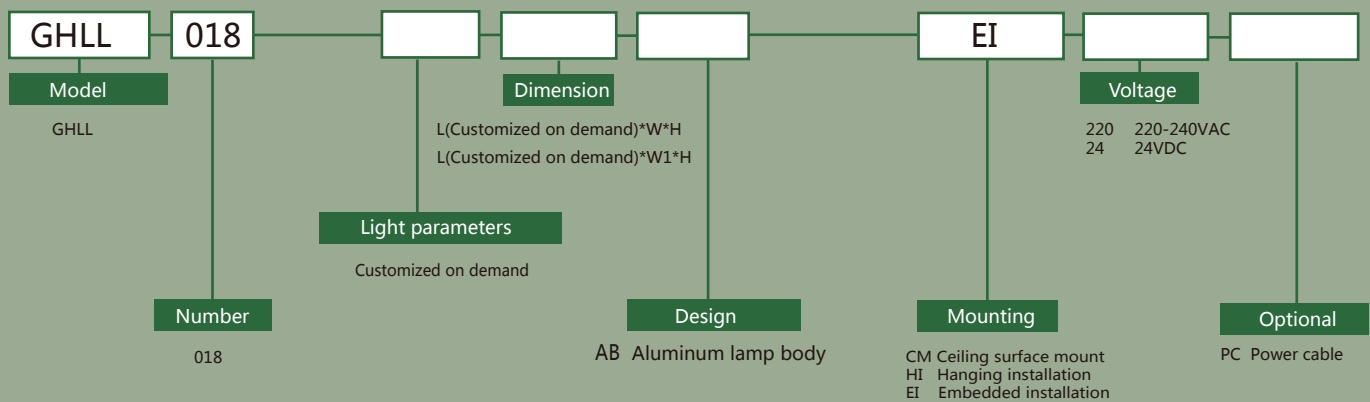

Remark: compliance with the requirement of the buyer, technical modification is reserved.

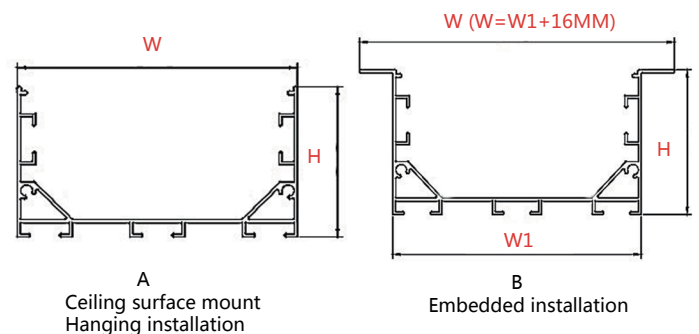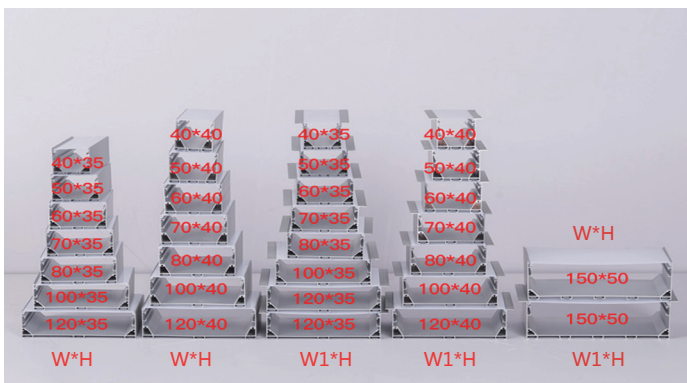

Model	Number	Light parameters	Dimension(mm)
GHLL	018(A)	Customized on demand	L(Customized on demand)*W*H
GHLL	018(B)	Customized on demand	L(Customized on demand)*W1*H

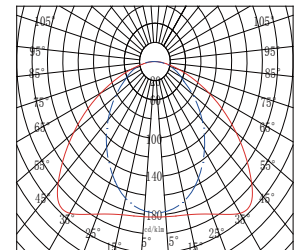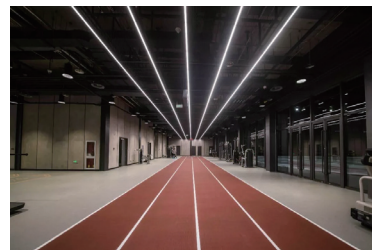

Lighting control

Manual control
Intelligent control
Emergency control

Dimming method

Dim0/1-10V dimmable
DALI dimmable
Triac dimmable
DMX512 dimmable
Not dimmable

luminous flux

100LM/W
120LM/W

LED driver

Optional configuration brand:

MEAN WELL
PHILIPS
OSRAM
TRIDONIC
LTECH
LIFUD
KEGUPower

light source

Optional configuration brand:

CREE
BRIDGELUX
PHILIPS
OSRAM
EPISTAR
SANAN

Life expectancy

50,000 h (Ta=25°C)

Certification certificate

CE
RoHS
CQC
CCC

Color rendering

Ra ≥ 80
Ra ≥ 90

Color temperature

2700-3000K
3500-4000K
6000-6500K