

Product's Features

- The main body is made of die-cast aluminum, Lamp color : Black or white or gray
- Diffuser: acrylic and polycarbonate optional
- Anti-Glare lighting design
- lamp holder,connecting terminal, electrical wire with High temperature resistant flame retardant

Applications


- Application:office,supermarket,school workshop washing room etc

Technical parameters

- Light Source : LED , Energy saving lamp,Incandescent lamp
- Light Base : LED,E27
- Light Power : 10W,15W,20W,60W
- Working Power : 220V~240V , 50Hz
- IP Grade : IP65
- Insulation Grade : Class1
- Safety Standards : IEC598
- Color rendering index: Ra ≥ 80 , Ra ≥ 90
- Lumen value:100LM/W,120LM/W
- Life expectancy : 50,000 h (Ta=25°C)




Order Guide :

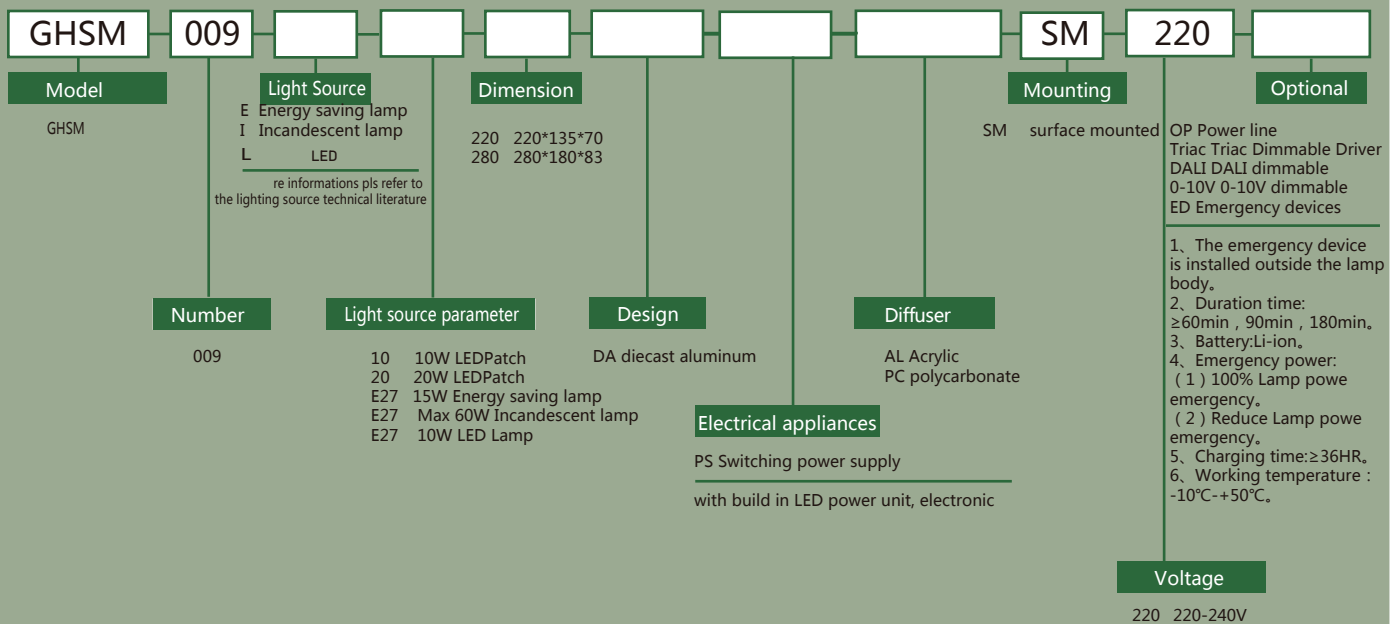

1. The emergency device is installed outside the lamp body.
2. Duration time: ≥60min, 90min, 180min.
3. Battery:Li-ion.
4. Emergency power: (1) 100% Lamp power emergency. (2) Reduce Lamp power emergency.
5. Charging time:≥36HR.
6. Working temperature : -10°C-+50°C.

Remark:compliance with the requirement of the buyer

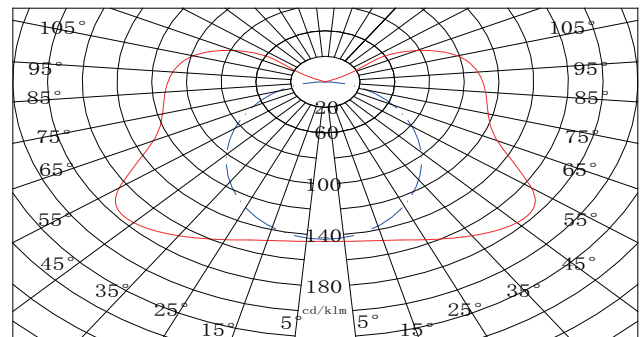

Model	Number	Power(W)	Dimension	Color temperature(K)
GHSM	009	10	220*135*70	3000/4000/6000
GHSM	009	20	280*180*83	3000/4000/6000
GHSM	009 E27/Optional light source		280*135*70	3000/4000/6000
GHSM	009 E27/Optional light source		280*180*83	3000/4000/6000



Lighting control	Dimming method	luminous flux
Manual control Intelligent control Emergency control	Dim0/1-10V dimmable DALI dimmable Triac dimmable DMX512 dimmable Not dimmable	100LM/W 120LM/W

LED driver	light source	Life expectancy
Optional configuration brand: MEAN WELL PHILIPS OSRAM TRIDONIC LTECH LIFUD KEGUPOWER	Optional configuration brand: CREE BRIDGELUX PHILIPS OSRAM EPISTAR SANAN FSL	50,000 h (Ta=25°C)

Certification certificate	Color rendering	Color temperature
CE RoHS COGC CCC	Ra ≥ 80 Ra ≥ 90	2700-3000K 3500-4000K 6000-6500K