

Product's Features

- Black border and white border optional
- Waterproof, dustproof, anti-mosquito
- Diffuser: PP
- Anti-glare lighting design
- Lampshade pattern can be customized

Application


- Application: office, supermarket, school workshop washing room etc

Technical parameters


- Light source: LED
- Lamp holder: LED patch
- Power: Configure on demand
- Voltage: 220V~240V, 50Hz
- Color temperature: 3000K, 4000K, 6000K
- Life expectancy: 50,000 h (Ta=25°C)
- IP Grade: IP54
- Insulation Grade: Class 1
- Safety Standards: IEC598
- Color rendering index: Ra ≥ 80, Ra ≥ 90
- Lumen value: 100LM/W, 120LM/W



Order Guide:

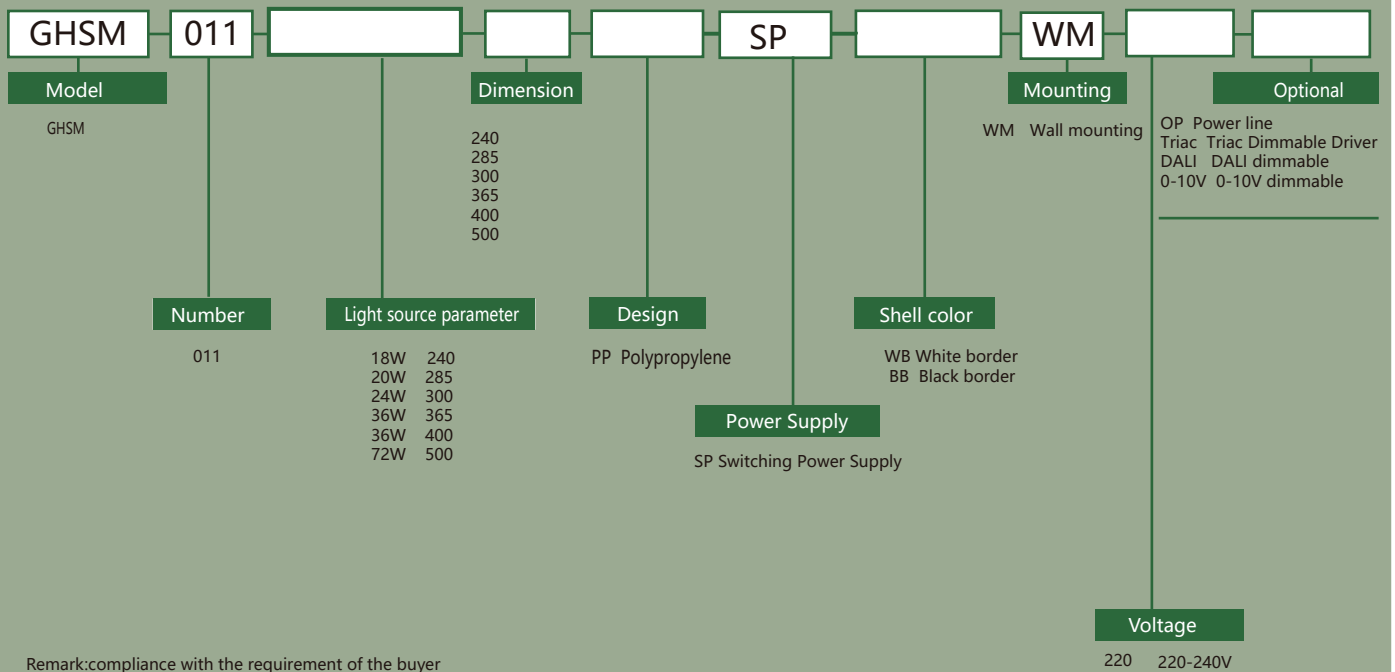

Model	Number	Light source category	Power(W)	Diameter(mm)	Color temperature(K)
GHSM	011	LED	18W	240	3000K,4000K,6000K
GHSM	011	LED	20W	285	3000K,4000K,6000K
GHSM	011	LED	24W	300	3000K,4000K,6000K
GHSM	011	LED	36W	365	3000K,4000K,6000K
GHSM	011	LED	36W	400	3000K,4000K,6000K
GHSM	011	LED	72W	500	3000K,4000K,6000K

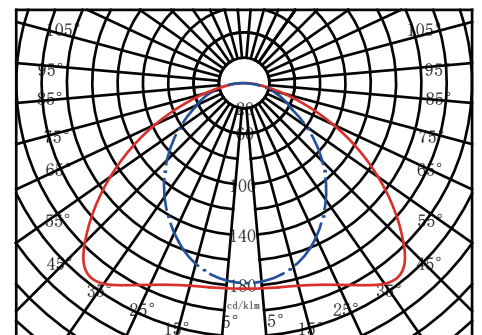

Lighting control	Dimming method	luminous flux
Manual control Intelligent control Emergency control	Dim0/1-10V dimmable DALI dimmable Triac dimmable DMX512 dimmable Not dimmable	100LM/W 120LM/W

LED driver	light source	Life expectancy
Optional configuration brand: MEAN WELL PHILIPS OSRAM TRIDONIC LTECH LIFUD KEGUPOWER	Optional configuration brand: CREE BRIDGELUX PHILIPS OSRAM EPISTAR SANAN	50,000 h ( Ta=25°C )

Certification certificate	Color rendering	Color temperature
CE RoHS COGC CCC	Ra ≥ 80 Ra ≥ 90	2700-3000K 3500-4000K 6000-6500K