


Product's Features

- Shell: aluminum and silicone strip
- DC pair wiring
- A variety of LED chips are available
- LED lamp bead model: 3014
Single lamp bead lumens: 12-14 (lm)
LED lamp bead model: 2835
Single lamp bead lumens: 21-23 (lm)
Number of LED lamp beads: 60 (pcs/m)


- **Application**
Stair step

Technical parameters

- Light source: LED
- Lamp holder: LED patch
- Power: Configure on demand
- Voltage: 12/24VDC, 50Hz
- IP Grade : IP20
- Insulation Grade : Class 1
- Safety Standards : IEC598
- Life expectancy: 3 years

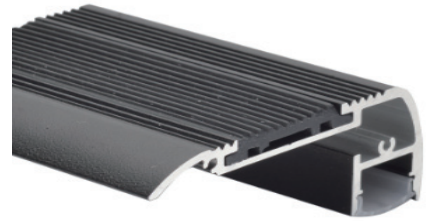



Order Guide:

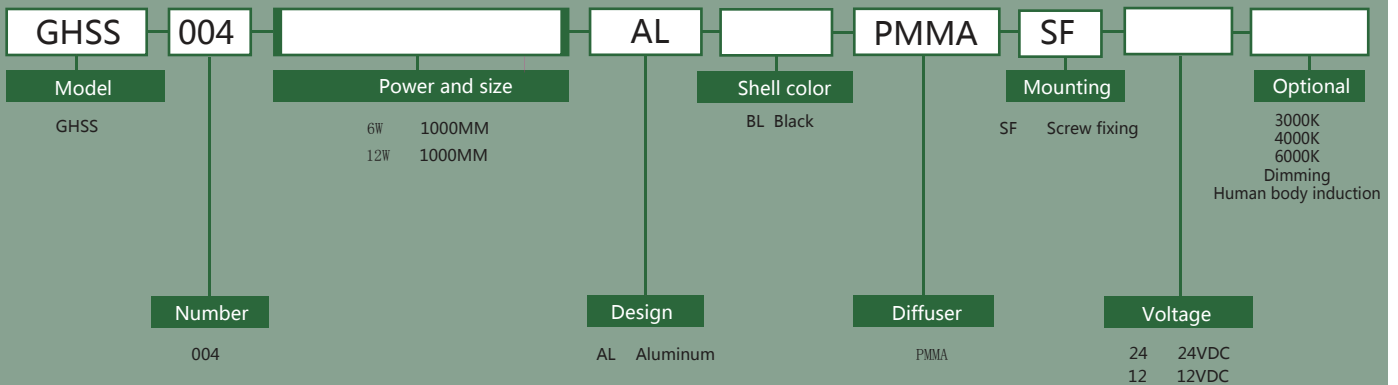

Installation steps:

1. Fix the aluminum lamp body with expansion screws
2. Install plastic strips
3. Connect the lamp wires , A space shall be reserved near the lamps to place the switching power supply
4. Install the end cap

Remark:compliance with the requirement of the buyer

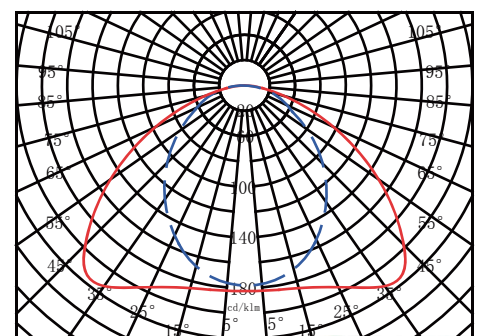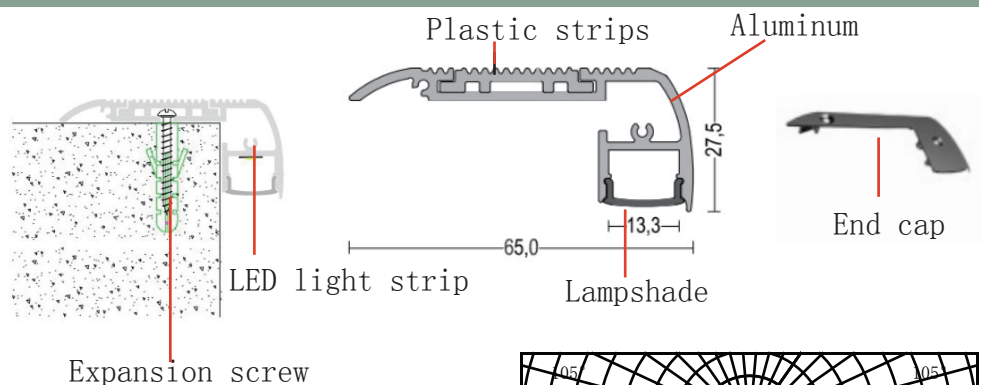

Model	Number	Lamp power(W)	Size	Color temperature
GHSS	004	6W	1000MM	3000K
GHSS	004	6W	1000MM	4000K
GHSS	004	6W	1000MM	6000K
GHSS	004	12W	1000MM	3000K
GHSS	004	12W	1000MM	4000K
GHSS	004	12W	1000MM	6000K