

Product's Features:

Shell material: PC
 Mounting Buckle: Stainless Steel
 Radiator: Built-in aluminum radiator
 Unique design:
 anti-glare stripe design on the inner wall of the lampshade

Technical Parameters:


Light source: LED
 Lamp power: 20~50W
 Ingress Protection: IP65
 Color temperature: 2700-3000K, 3500-4000K, 6000-6500K
 Insulation class: class 1
 Safety standard: IEC598
 Color rendering index: Ra ≥ 80, Ra ≥ 90
 Lumen value: 100LM/W, 120LM/W
 Life: 50,000 hours (Ta=25°C)

Applications:

Factories, corridors, supermarkets, schools, restaurants, hospitals, warehouses, underground parkings, and other public places




Order Guide :



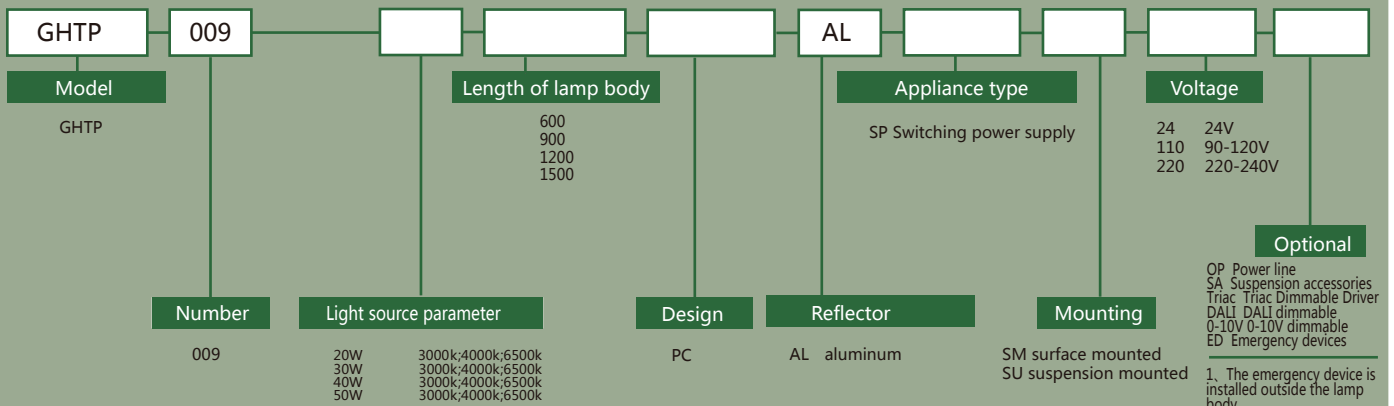


- Optional**
- OP Power line
 - SA Suspension accessories
 - Triac Triac Dimmable Driver
 - DALI DALI dimmable
 - ED Emergency devices
1. The emergency device is installed outside the lamp body.
 2. Duration time: ≥60min, 90min, 180min.
 3. Battery: Li-ion.
 4. Emergency power: (1) 100% Lamp power emergency. (2) Reduce Lamp power emergency.
 5. Charging time: ≥36HR.
 6. Working temperature: -10°C~+50°C.

Remark: compliance with the requirement of the buyer

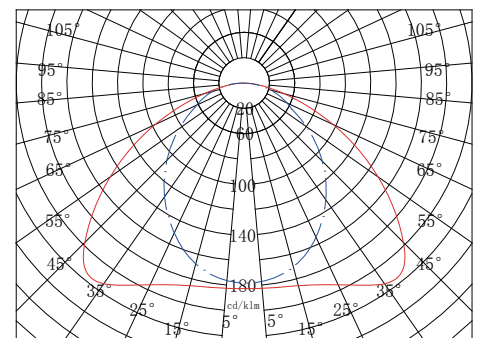

Model	Number	Light source parameter	Length of lamp body (mm)
GHTP	009	20W 3000k;4000k;6500k	600
GHTP	009	30W 3000k;4000k;6500k	900
GHTP	009	40W 3000k;4000k;6500k	1200
GHTP	009	50W 3000k;4000k;6500k	1500



Lighting control	Dimming method	luminous flux
Manual control Intelligent control Emergency control	Dim0/1-10V dimmable DALI dimmable Triac dimmable DMX512 dimmable Not dimmable	100LM/W 120LM/W

LED driver	light source	Life expectancy
Optional configuration brand: MEAN WELL PHILIPS OSRAM TRIDONIC LTECH LIFUD KEGUPOWER	Optional configuration brand: CREE BRIDGELUX PHILIPS OSRAM EPISTAR SANAN FSL	50,000 h (Ta=25°C)

Certification certificate	Color rendering	Color temperature
CE RoHS COGC CCC	Ra ≥ 80 Ra ≥ 90	2700-3000K 3500-4000K 6000-6500K