

Product's Features

- Stainless steel panel
- Silicone seals, high quality water-proof joint
- Pervious to light part is tempered glass
- Using embedded parts installation

Technical parameters

- Light Source : LED
- Light Power : 3W-48W、Customize other power
- Electric Type : switch power
- Working Power : 24VDC、240VAC , 50Hz

Applications

- Office, Supermarket, School, Workshop, etc.



- IP Grade : IP67
- Insulation Grade : Class 1
- Safety Standards : IEC598



Order Guide :

GHUG	009								
Model	Color temperature	Dimension		switch power	Mounting			Optional	
GHUG	2700-3000K 3800-4200K 6000-6500K Green Blue RGB	200 200*80 300 300*90 500 500*90 600 600*90 1000 1000*90 1000 1000*120 Customized dimension		PS switch power for more information pls refer to the switch power technical literature	FM flush mount			OP power line	
Number	Light source parameter	Design					Voltage		
009	200*80 3W 200*80 5W 200*80 6W 300*90 6W 300*90 7W 300*90 9W 500*90 9W 500*90 12W 500*90 18W 600*90 9W 600*90 12W 600*90 18W 1000*90 18W 1000*90 24W 1000*90 36W 1000*120 48W	SS Stainless steel panel					24 24VDC 220 220VAC		

Remark: compliance with the requirement of the buyer

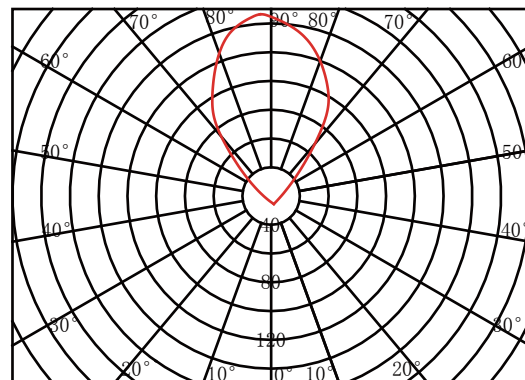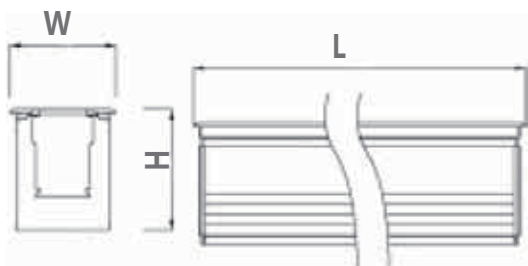

Model	Number	Connected load(W)	L(mm)	W(mm)
GHUG	009	3/5/6	200	80
GHUG	009	6/7/9	300	90
GHUG	009	9/12/18	500	90
GHUG	009	9/12/18	600	90
GHUG	009	18/24/36	1000	90
GHUG	009	48	1000	120