

Product's Features

- Lighting by the spraying or spinning aluminum die-cast aluminum oxide constitutes
- 4 pcs Cast light glasses
- Die-cast aluminum : Φ170mm H165mm
- Spun aluminum : Φ180mm H180mm

Technical parameters


- Light Source : LED
- Light Power : 4W、12W
- Ballast: switching power supply
- Working Power : 220-240V , 50Hz
- IP Grade : Die-cast aluminum IP65; Spun aluminum IP55
- Insulation Grade : Class 1
- Safety Standards : IEC598

Applications


- Application:office,supermarket,school workshop washing room etc





Order Guide :

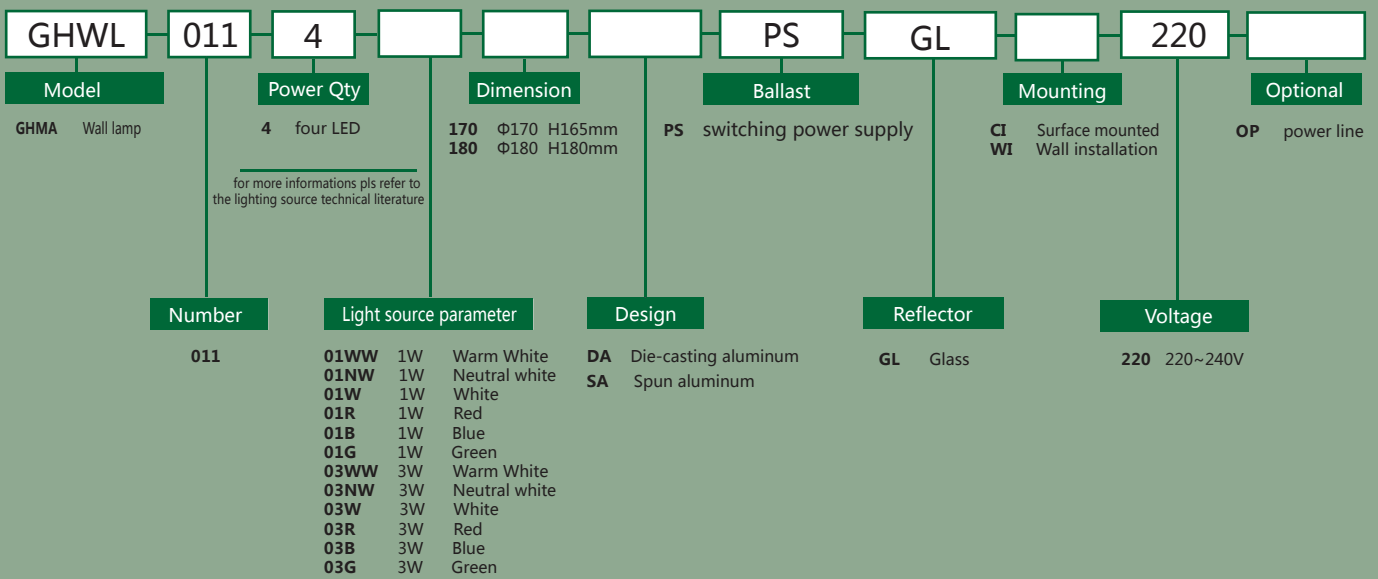


Remark:compliance with the requirement of the buyer



GHWL-011-4-03-170-DA



GHWL-011-4-03-180-SA

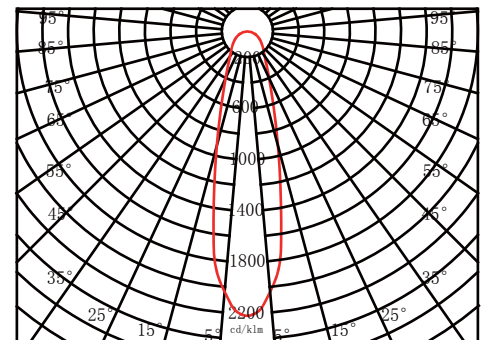

Model	Number	Tube amount	Power(W)	Reflector	Outline Dim(mm)
GHWL	011	4	4、12	Die-casting aluminum	Φ170 H165mm
GHWL	011	4	4、12	Spun aluminum	Φ180 H180mm

