

Product's Features

- Lamp body: Aluminum
- Surface color: all white or white with black circle
- Lampshade: transparent or milky white
- Reflector: Aluminum
- Color temperature: 3000K, 4000K, 6000K.

Applications

- Office, Supermarket, School, Workshop, etc.

Technical parameters

- Light Source: LED
- Light Base: COB
- Light Power: 5W-90W
- Electric Type: Switching power supply
- Working Power: AC220-240V, 50Hz
- IP Grade: IP20
- Insulation Grade: Class 1
- Safety Standards: IEC598
- Color rendering index: Ra ≥ 80
- Lumen value: 100-120LM / W
- Life expectancy: 5 years




Order Guide:

GHGP	009						EI	220	
Model	LED Qty	Dimension	Transformer	Mounting	Optional	Number	Light source parameter	Design	Luminous angle
GHGP	1 one light 2 two lights 3 three lights <small>for more informations pls refer to the lighting source technical literature</small>	92*92MM 120*120MM 140*140MM 160*160MM 180*92MM 230*120MM 280*140MM 320*160MM 250*92MM 330*120MM 400*140MM	SP Switching power supply <small>for more information pls refer to the ballast technical literature</small>	EI Embedded installation	OP power line ED External emergency device <small>Emergency device is mounted outside the lamp body. Emergency one light or two lights or three lights optional. Duration: ≥90-180min, Charging time: ≥24HR, Working temperature: -10°C+50°C,</small>	009	1*5/7W 92*92MM 1*10/15W 120*120MM 1*20/30W 140*140MM 1*35/40W 160*160MM 2*5/7W 180*92MM 2*10/15W 230*120MM 2*20/30W 280*140MM 2*35/40W 320*160MM 3*5/7W 250*92MM 3*10/15W 330*120MM 3*20/30W 400*140MM	AL Aluminum	15° 24° 36°
								Voltage	220 AC220-240V

Remark:compliance with the requirement of the buyer



one light two lights three lights

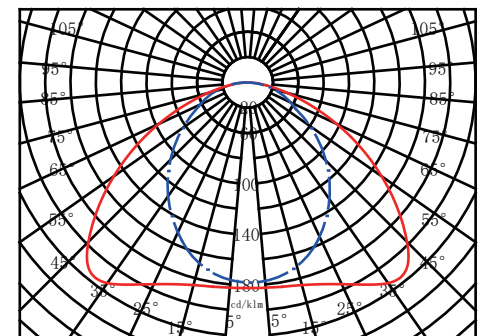

Model	Number	LED Qty	Power(W)
GHGP	009	1	1*5/7W,1*10/15W,1*20/30W,1*35/40W
GHGP	009	2	2*5/7W,2*10/15W,2*20/30W,2*35/40W
GHGP	009	3	3*5/7W,3*10/15W,3*20/30W

